

FLIR A8300sc MWIR

Compact, High Definition, MWIR performance camera



HIGH SENSITIVITY, HD THERMAL IMAGES

The A8300sc incorporates a cooled FLIR Indium Antimonide (InSb) detector that operates in the 3 to 5 micron waveband. It produces crisp mega pixel thermal images of 1280 x 720. Achieving a high thermal sensitivity with very low noise (typically <math><20\text{mK}</math>), the FLIR A8300sc is able to capture the finest image details.

FAST INTEGRATION TIMES

Working in snapshot mode, the FLIR A8300sc is able to capture all pixels from a scene simultaneously. This is particularly important when monitoring fast moving objects where an uncooled thermal imaging camera would suffer from image blur. The camera supports faster frame rates when operating in windowing mode.

STANDARD VIDEO INTERFACES

Using a standard GigE Vision® interface to transmit full dynamic range digital video, and GenICam for camera control, the FLIR A8300sc is a true “plug and play” thermal imaging camera. Additional interfaces include BNCs for CoaXPress (CXP) and HD-SDI video output. The video interfaces are simultaneously active yet independently controlled allowing greater flexibility for recording and display purposes.

SOFTWARE


The FLIR A8300sc camera works seamlessly with FLIR ResearchIR Max software enabling intuitive viewing, recording and advanced processing of the infrared data provided by the camera. A Software Developers Kit (SDK) is optionally available.

COMPATIBLE WITH 3RD PARTY SOFTWARE


Control the A8300sc and capture data directly into MathWorks® MATLAB software for advanced image analysis and enhancement.

KEY FEATURES

- True HD Imagery with 1280 x 720 pixels
- High sensitivity low noise: 20mK
- Small target measurement down to 3.5 μm
- HD-SDI video output
- Wide choice of optics

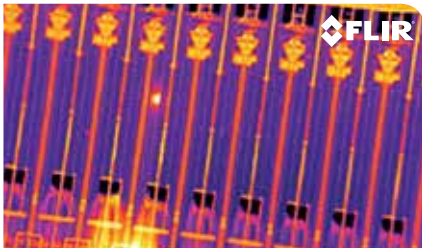

Electronics microscopy

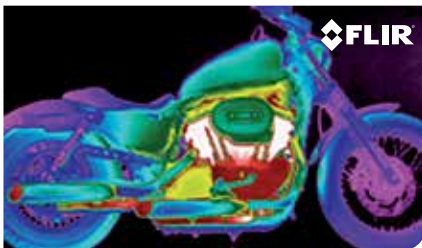


Motorcycle thermal validation

GigE™ VISION GEN<i>CAM

MathWorks

Imaging Specifications

System Overview	FLIR A8300sc MWIR
Detector Type	FLIR Indium Antimonide (InSb)
Spectral Range	3.0 – 5.0 μ m
Resolution	1280 x 720
Detector Pitch	14 μ m
NETD	<20 mk
Well Capacity	5.9 M electrons
Operability	>99.5% (99.9% typical)
Sensor Cooling	Closed Cycle Linear
Electronics / Imaging	
Readout	Snapshot
Readout Modes	Asynchronous Integrate While Read; Asynchronous Integrate Then Read
Synchronization Modes	Sync In, Sync Out, Trigger In, Record Start
Integration Time	500 ns to Full Frame
Frame Rate (Full Window)	Programmable 0.0015Hz to 60Hz
Max Frame Rate (@ Full Window)	3201.8 Hz @ Minimum Window (64x4)
Subwindow Mode	Flexible (inc. of 64 columns, 4 rows)
Dynamic Range	14-bit
Digital Data Protocol	Gigabit Ethernet (GigE Vision 2.0), CoaXPress (Single CXP-1)
HD Video	HD-SDI
Camera Control	GenICam or RS-232
Measurement	
Standard Temperature Range	-20°C to 350°C (-4°F to 662°F)
Optional Temperature Range	Up to 1,500°C (2,732°F) Up to 2,000°C (3,632°F)
Optics	
Camera f/#	f/4.0
Available Lenses	17mm, 25 mm, 50 mm, 100 mm
Close-up Lenses / Microscopes	1x, 4x
Focus	Manual
Filtering	Behind the Lens
Image Presentation	
Palettes	Selectable 8-bit
AGC	Linear, PE, DDE
Zoom	Video Zoom is Auto Selected; > 1/4 window = 1x, < 1/4 window Res = 2x
General	
Operating Temperature Range	-40°C to +50°C (-40°F to 122°F)
Storage Temperature Range	-55°C to 80°C (-67°F to 176°F)
Shock / Vibration	40 g, 11 msec ½ sine pulse / 4.3 g RMS Random Vibration, All 3 Axis
Power	24 VDC (<50 W steady state)
Weight w/o Lens	TBD
Size (L x W x H) w/o Lens	TBD
Mounting	2 x ¼" -20, 1 x 3/8" - 16, 4 x 10/24

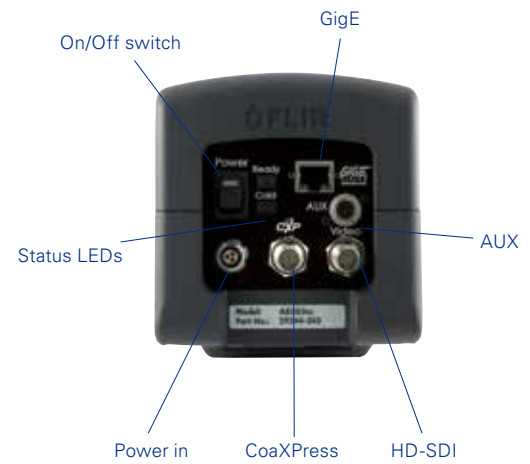

PORTLAND
Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 866.477.3687

BELGIUM
FLIR Systems Trading
Belgium BVBA
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5100

SWEDEN
FLIR Systems AB
Antennvägen 6,
PO Box 7376
SE-187 66 Täby
Sweden
PH: +46 (0)8 753 25 00

www.flir.com
NASDAQ: FLIR

Specifications are subject to change without notice
©Copyright 2015, FLIR Systems, Inc. All other brand and product names are trademarks of their respective owners. The images displayed may not be representative of the actual resolution of the camera shown. Images for illustrative purposes only. (Created 04/15)

NASHUA
FLIR Systems, Inc.
9 Townsend West
Nashua, NH 06063
USA
PH: +1 603.324.7611

UK
FLIR Systems UK
2 Kings Hill Avenue
Kings Hill
West Malling - Kent
ME19 4AQ
United Kingdom
PH: +44 (0)1732 220 011