



FLIR *EX Series*

Point-and-Shoot Thermal Imaging Cameras

FLIR E5, E6, and E8 infrared cameras are powerful and extremely cost-effective, easy-to-use troubleshooting tools for building, electrical, and mechanical applications. Four resolution options are available (ranging from 120 x 190 IR pixels to 320 x 240) to fit the target size, working distance, and detail you require. All include MSX® technology that provides extraordinary thermal imaging detail. Wi-Fi connectivity to smartphones and tablets via the FLIR Tools Mobile app makes sharing images and sending reports from any location easier, enabling you to make critical decisions faster. By providing thermal images to help you find hidden problems along with accurate temperature measurements, an Ex-Series camera is the ideal budget-friendly replacement for old-school IR thermometers.

Easy to use

Intuitive, user-friendly interface for measurements in thermal or MSX mode

- Fully automatic and focus-free
- Simple button navigation to on-screen settings, imaging modes, and measurement tools
- MSX adds digital camera detail to IR images for better perspective and interpretation

Conveniently share images and findings


Download images, create reports, and show what you've found instantly

- Wi-Fi connectivity to mobile devices via FLIR Tools Mobile app
- Rapid Wi-Fi or USB image transfer for documentation
- Analyze and edit images, and create convincing reports with FLIR Tools


Compact and rugged

Built for portability and use in harsh environments

- Lightweight (575 g) and withstands 2-meter drop test
- Hard transport case included
- 2-year warranty coverage on the camera, 10 years on the detector

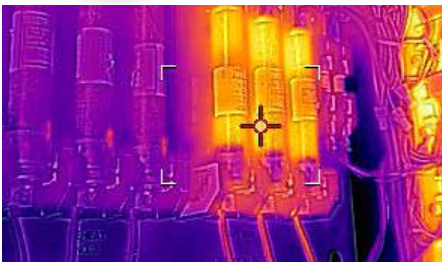

MSX shows you numbers, labels and structural features, eliminating the need to look at a visual image for detail

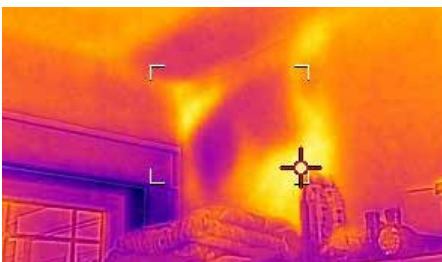

See temperature patterns showing insulation voids and other building issues

Specifications

Features by Camera	E5	E6	E8
IR resolution	120 × 90 pixels	160 × 120 pixels	320 × 240 pixels
Thermal sensitivity/NETD	<100 mK	<60 mK	
Image adjustment	Automatic adjust/lock image	Automatic/Manual	
Common Features			
Field of view (FOV)	45° × 34°		
Minimum focus distance	0.5 m		
Image frequency	9 Hz		
Focus	Focus free		
Wi-Fi	Peer-to-peer or network		
Detector type	Uncooled microbolometer		
Image Presentation and Modes			
Display	3.0 in. 320 × 240 color LCD		
Image modes	Thermal MSX®, thermal, picture-in-picture, thermal blending, digital camera		
Multi Spectral Dynamic Imaging (MSX)	IR image enhanced with visible camera detail		
Picture in Picture	IR area on visual image		
Color palettes	Black & white, iron, and rainbow		
Digital camera resolution/FOV	640 × 480/55° × 43°		
Measurement Features			
Object temperature range	-20°C to +250°C		
Accuracy	±2°C or ±2% of reading, for ambient temperature 10°C to 35°C and object temperature above +0°C		
Spotmeter; area	Center spot; box with min./max.		
Emissivity table/correction	Emissivity table of predefined materials/variable from 0.1 to 1.0		
Additional Data			
File formats	Standard JPEG, 14-bit measurement data included		
Interfaces	USB Micro: Data transfer to and from PC and Mac device		
Battery type & operating time	Rechargeable 3.6 V Li ion battery; approx. 4 hours typical use		
Encapsulation/drop	IP 54 (IEC 60529)/2m		
Camera weight,incl. battery	575 g		

Specifications are subject to change without notice. For the most up-to-date specifications, go to www.flir.com



Download images fast via USB



Wireless Connectivity to Smartphones, Tablets and more.

SWEDEN

Instruments Division
 FLIR Systems AB
 Antennvägen 6
 187 66 Täby
 Tel. : +46 (0)8 753 25 00
 E-mail : flir@flir.com

FLIR Germany

Frankfurt
 Tel. +49 (0)69 95 00 900

FLIR France

Torcy
 Tel. +33 (0)1 60 37 01 00

FLIR Spain

Madrid
 Tel. +34 91 573 48 27

FLIR Russia

Moscow
 Tel. + 7 495 669 70 72

FLIR Africa

Johannesburg
 Tel. +27 11 300 5622

Benelux

Sales Administration
 FLIR Commercial Systems
 Luxemburgstraat 2
 2321 Meer
 Belgium
 Tel.: +32 (0) 3665 5100

FLIR Italy

Milan
 Tel. +39 (0)2 99 45 10 01

FLIR UK

West Malling
 Tel. +44 (0)1732 220 011

FLIR Middle East

Dubai
 Tel. +971 4 299 6898

FLIR Turkey

Istanbul
 Tel. +90 (212) 317 90 55

www.flir.com
 NASDAQ: FLIR

For more information:

flir@flir.com

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved. (Updated Jan 24) 17-0072_EMEA